
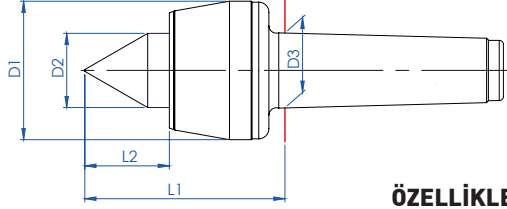


DÖNER PUNTALAR NORMAL UÇLU

TİP 100

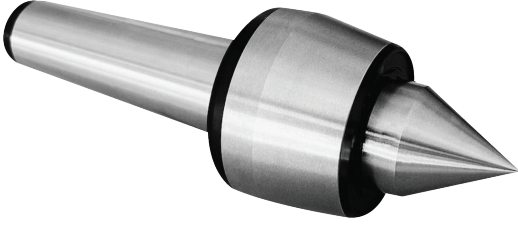


ÖZELLİKLER

- RULMAN ÖMRÜ 2000 İŞ SAATİDİR.
- PUNTA UCU SERTLİĞİ : 60-62 HRc
- SALGI : MAX. 0,008 mm

KOD	KONİK	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	DEVİR d/d (max)	PARÇA AĞIRLIĞI Kg (max)	FİYAT EUR
102	MK2	48	21,5	17.780	74	26	6000	150	
103	MK3	57	25	23.825	86,5	31	4300	300	
104	MK4	68	34,5	31.267	102	40	3500	600	
105	MK5	82	44	44.399	118,5	50	2500	1100	
106	MK6	103	54,5	63.348	148	60	1900	2000	

DÖNER PUNTALAR KOPYE UÇLU

TİP 110

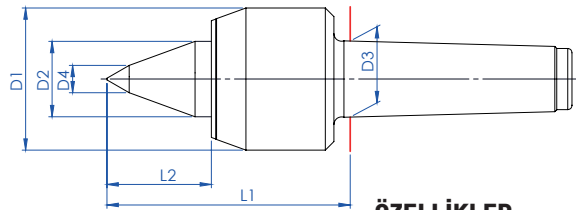

ÖZELLİKLER

- RULMAN ÖMRÜ 2000 İŞ SAATİDİR.
- PUNTA UCU SERTLİĞİ : 60-62 HRc
- SALGI : MAX. 0,008 mm

KOD	KONİK	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	L1 (mm)	L2 (mm)	DEVİR d/d (max)	PARÇA AĞIRLIĞI Kg (max)	FİYAT EUR
114	MK4	68	34,5	31.267	12	112	50	3500	450	
115	MK5	82	44	44.399	15	130	62	2500	850	