


TIRNAKLI PUNTALAR (BASMA ÇAPI 15mm-30mm)

TİP 320



MEKANİK KİLİTLEMELİ

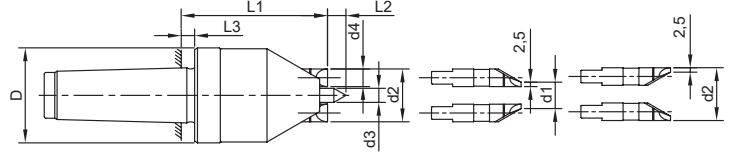

SALGISI 0,02 mm' YE KADAR AYARLANABİLİR.

MİL VE TIRNAKLARDA SERTLİK : 60-63 HRC


KOD	KONİK	d1 (mm)	d2 (mm)	d3 (mm)	d4 (mm)	TORNALAMA ÇAPI (mm)		D (mm)	L1 (mm)	L2 (mm)	L3 (mm)	TIRNAK SAYISI	FİYAT EUR
						MİN.	MAX.						
323	MK3	15	30	8	10	16	60	54	80	7,5	5	3+3	
324	MK4	15	30	8	10	16	60	54	80	7,5	5	3+3	
325	MK5	15	30	8	10	16	60	54	80	7,5	5	3+3	

TIRNAKLI PUNTALAR (BASMA ÇAPI 24mm-45mm)

TİP 340



MEKANİK KİLİTLEMELİ

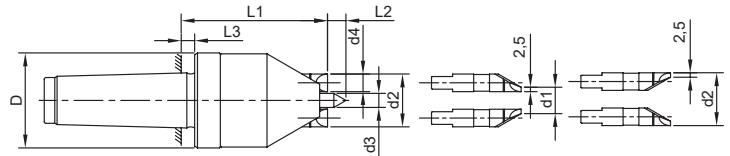

SALGISI 0,02 mm' YE KADAR AYARLANABİLİR.

MİL VE TIRNAKLARDA SERTLİK : 60-63 HRC

KOD	KONİK	d1 (mm)	d2 (mm)	d3 (mm)	d4 (mm)	TORNALAMA ÇAPI (mm)		D (mm)	L1 (mm)	L2 (mm)	L3 (mm)	TIRNAK SAYISI	FİYAT EUR
						MİN.	MAX.						
344	MK4	24	45	17	13	25	90	69	94	15	5	6+6	
345	MK5	24	45	17	13	25	90	69	94	15	5	6+6	

YEDEK TIRNAK VE MİL İÇİN FİYAT VE TESLİM ALINIZ.