


BORU PUNTALARI 60 DERECE UÇ AÇILI

TİP 200

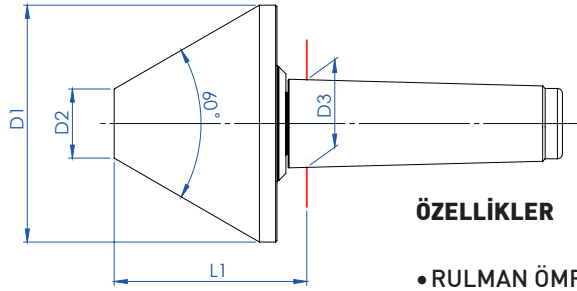


ÖZELLİKLER

- RULMAN ÖMRÜ 2000 İŞ SAATİDİR.
- PUNTA UCU SERTLİĞİ : 60-62 HRC
- SALGI : MAX. 0,001 mm

KOD	KONİK	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	DEVİR d/d (max)	İŞ PARÇASI AĞIRLIĞI Kg (max)	FİYAT EUR
203	MK3	80	25	23.825	82	3000	300	
213	MK3	100	30	23.825	85	2400	500	
204	MK4	120	35	31.267	95	2400	500	
205	MK5	120	35	44.399	97,5	1800	600	
214	MK4	140	45	31.267	107,5	2400	500	
215	MK5	140	45	44.399	109,5	1800	600	
225	MK5	170	50	44.399	129,5	1500	800	

BORU PUNTALARI 90 DERECE UÇ AÇILI

TİP 210/230

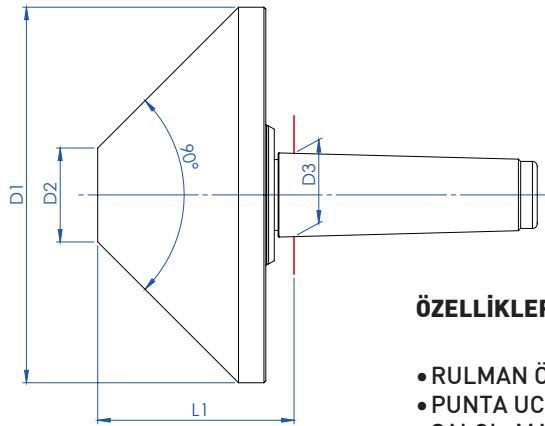

ÖZELLİKLER

- RULMAN ÖMRÜ 2000 İŞ SAATİDİR.
- PUNTA UCU SERTLİĞİ : 60-62 HRC
- SALGI : MAX. 0,001 mm

KOD	KONİK	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	DEVİR d/d (max)	İŞ PARÇASI AĞIRLIĞI Kg (max)	FİYAT EUR
236	MK4	200	45	31,267	107,5	2400	500	
235	MK5	200	50	44,399	104,5	1200	1000	
206	MK6	200	50	63,348	108	1000	1250	
216	MK6	250	70	63,348	148,5	800	1500	