





High-Precision Digital Indicators

406 Series

NEW



406-05-6

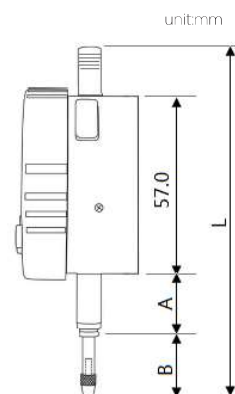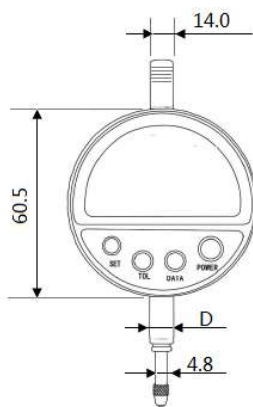

FEATURES

- Resolution: .00002" , .00005" / 0.0005mm, 0.001mm
- Absolute measurement
- 270 deg. screen rotation
- Inch/Metric conversion
- Relative measurement/absolute measurement
- conversion
- Extreme value measurement: max, min, max-min
- Set it to zero anywhere
- Locking in value
- Tolerance setting
- Change of direction of measurement
- Analog pointer display: display measurement direction, out of tolerance alarm
- Automatic shutdown, low battery warning
- Type-C charging supports the charging bank
- Virtual keyboard protocol, standard data acquisition



Inch				Dimensions			
Code No.	Range	Resolution	Accuracy	L	A	B	D
406-05-7	0-0.5"	.00005"	±.00008"	4.69"	0.87"	0.87"	3/8"
406-01-7	0-1"	.00005"	±.0001"	5.98"	0.79"	1.38"	3/8"
406-02-7	0-2"	.00005"	±.0002"	8.76"	0.79"	2.38"	3/8"
406-05-9	0-0.5"	.00002"	±.00008"	4.69"	0.87"	0.87"	3/8"
406-01-9	0-1"	.00002"	±.00008"	5.98"	0.79"	1.38"	3/8"
406-02-9	0-2"	.00002"	±.00016"	8.76"	0.79"	2.38"	3/8"

Metric				Dimensions			
Code No.	Range	Resolution	Accuracy	L	A	B	D
406-05-6	0-12.7mm	0.001mm	0.002mm	119mm	22mm	22mm	8mm
406-01-6	0-25.4mm	0.001mm	0.003mm	152mm	20mm	35mm	8mm
406-02-6	0-50.8mm	0.001mm	0.005mm	222.5mm	20mm	60.5mm	8mm
406-05-8	0-12.7mm	0.0005mm	0.002mm	119mm	22mm	22mm	8mm
406-01-8	0-25.4mm	0.0005mm	0.002mm	152mm	20mm	35mm	8mm
406-02-8	0-50.8mm	0.0005mm	0.004mm	222.5mm	20mm	60.5mm	8mm