



DELİK BÜYÜTME SETİ

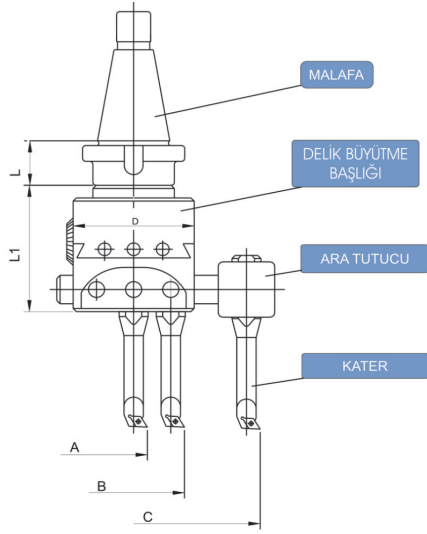

MALAFA	DELİK BÜYÜTME	D (mm)	L (mm)	L1 (mm)	KULLANILAN KATERİN ARKA ÇAPLARI mm	İŞLEME KAPASİTELERİ						AÇILMA (mm)
						A (mm)		B (mm)		C (mm)		
						Min.	Max.	Min.	Max.	Min.	Max.	
ISO30	F1 - 12	50	29	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
ISO40	F1 - 12	50	31	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
ISO50	F1 - 12	50	34,5	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
BT30	F1 - 12	50	46	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
BT40	F1 - 12	50	46	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
BT50	F1 - 12	50	46	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
MK3	F1 - 12	50	42,5	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
MK4	F1 - 12	50	49	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
MK4KM	F1 - 12	50	49	62	10-12	13,6	45	45	77	94	177	16
					12-12	17	49	48	80	97	180	
ISO30	F1 - 18	75	29	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
ISO40	F1 - 18	75	31	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
ISO50	F1 - 18	75	34,5	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
BT30	F1 - 18	75	46	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
BT40	F1 - 18	75	46	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
BT50	F1 - 18	75	46	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
MK3	F1 - 18	75	42,5	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
MK4	F1 - 18	75	49	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
MK4KM	F1 - 18	75	49	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	

DELİK BÜYÜTME SETİ

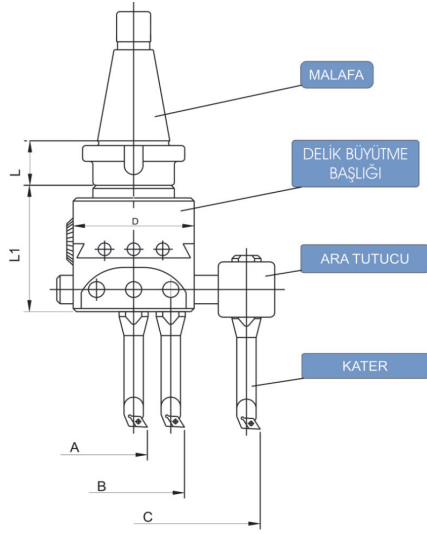

MALAFA	DELİK BÜYÜTME	D (mm)	L (mm)	L1 (mm)	KULLANILAN KATERİN ARKA ÇAPLARI mm	İŞLEME KAPASİTELERİ						AÇILMA (mm)
						A (mm)		B (mm)		C (mm)		
						Min.	Max.	Min.	Max.	Min.	Max.	
MK5	F1 - 18	75	55,5	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
MK5KM	F1 - 18	75	55,5	80	10-18	13,6	63	61	111	125	225	25
					12-18	17	67	64	114	127	228	
					16-18	21	71	68	118	131	232	
ISO30	F1 - 25	100	29	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
ISO40	F1 - 25	100	31	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
ISO50	F1 - 25	100	34,5	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
BT30	F1 - 25	100	46	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
BT40	F1 - 25	100	46	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
BT50	F1 - 25	100	46	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
MK3	F1 - 25	100	42,5	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
MK4	F1 - 25	100	49	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
MK4KM	F1 - 25	100	49	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
MK5	F1 - 25	100	55,5	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	
MK5KM	F1 - 25	100	55,5	80	16-25	21	103	84	166	166	300	41
					20-25	25	107	88	170	170	303	
					25-25	32	114	95	177	177	310	