


4 AYAKLI ÜNİVERSAL TORNA AYNASI

TİP K12

ÖZELLİKLER


- 4 AYAKLI MERKEZİ SIKMALI ÜNİVERSAL TORNA AYNASI
- DÖKÜM GÖVDELİDİR
- ÜNİVERSAL TORNA TEZGAHLARINDA FENER MİLİNE FLANŞ İLE BAĞLANIR
- FREZELERDE, DİVİZÖRLERDE VE TABLALARDA KULLANILIR

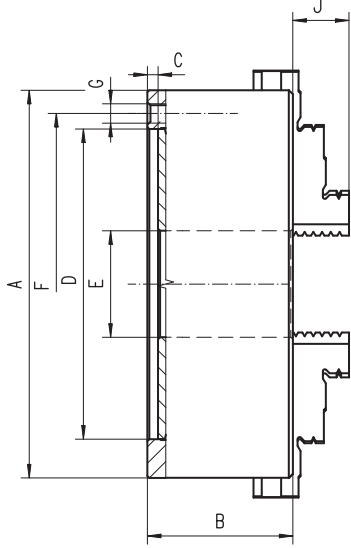

KOD	CHAR.80/4	CHAR.100/4	CHAR.125/4	CHAR.160/4	CHAR.200/4	CHAR.250/4	CHAR.315/4	CHAR.400/4	CHAR.500/4	CHAR.630/4
ØA	80	100	125	160	200	250	315	400	500	630
B	50	55	58	65	75	80	90	100	115	133,5
C	3,5	3,5	4	5	5	5	6	6	6	7
D H7	55	72	95	130	165	206	260	340	440	560
E	16	22	30	40	65	80	100	130	210	270
F	66	84	108	142	180	226	285	368	465	595
G	4xM6	3xM8	3xM8	6xM8	3XxM10	3xM12	3xM16	3xM16	6xM16	6xM16
J	16	19,5	26	30	34	40	57	72	87	84,5

STANDART AKSESUARLAR	1 TAKIM DÜZ AYAK	1 TAKIM TERS AYAK	1 ADET ANAHTAR	FLANŞ BAĞLAMA CİVATASI	İSTEĞE BAĞLI AKSESUARLAR	1 TAKIM YUMUŞAK AYAK	AYNA BAĞLAMA FLANŞI

ÜNİVERSAL TORNA AYNALARI SALGI DEĞERLERİ

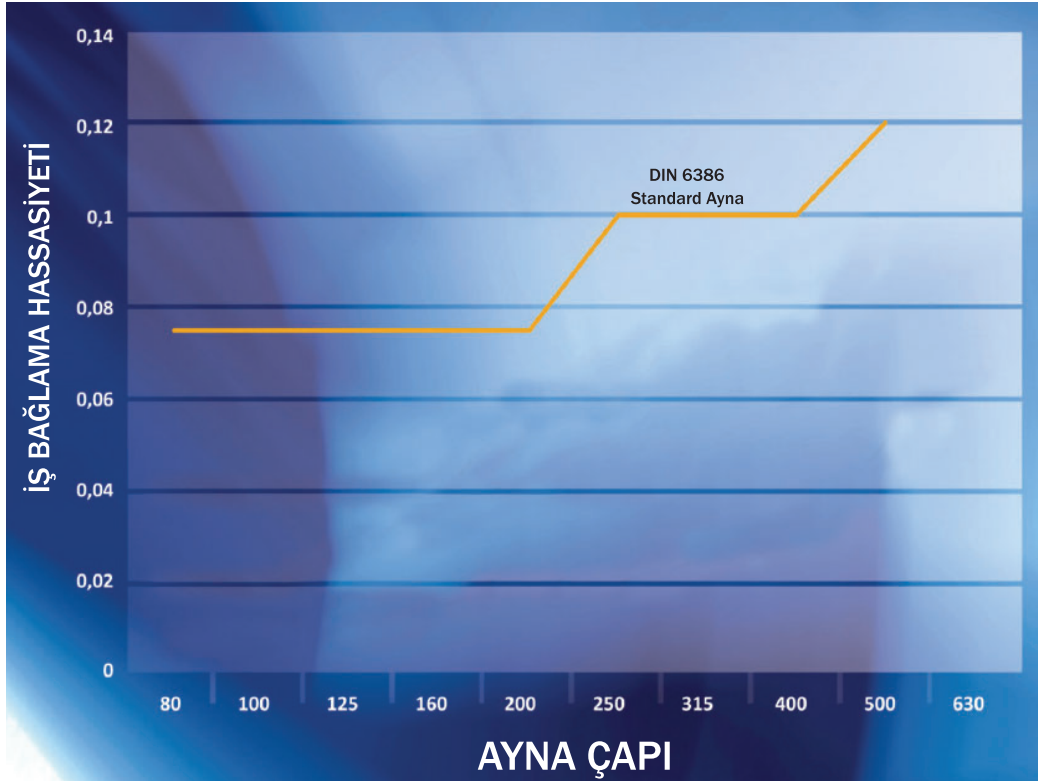

ÜNİVERSAL TORNA AYNALARI İŞ BAĞLAMA KAPASİTELERİ

AYNA ÇAPI (mm)	DÜZ AYAK İLE				TERS AYAK İLE	
	 d5 min.	 d6 max.	 d7 min.	 d8 max.	 d11 min.	 d12 max.
80	2	22	25	70	22	63
100	2	30	30	90	30	80
125	3	40	38	125	38	110
160	3	55	50	160	55	145
200	4	85	65	200	65	200
250	6	110	80	250	90	250
315	10	140	95	315	100	315
400	15	210	120	400	120	400
500	25	280	150	500	150	500
630	50	350	170	630	170	630