


BT KOMBİNE MALAFALAR

MAS 403-BT/JISB6339

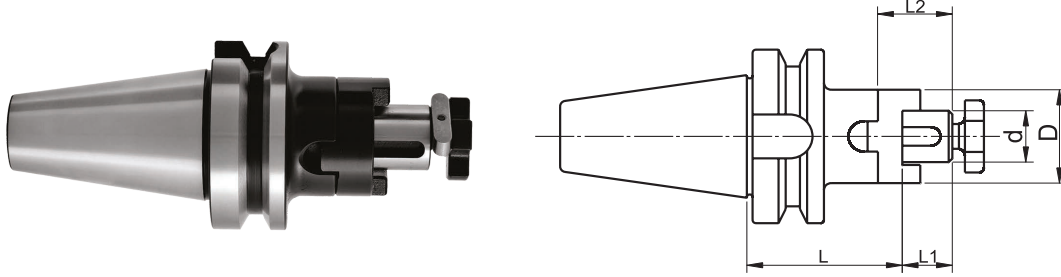

DIN 6358

- MALZEME : 20 Mn Cr5
- SERTLİK : 58 ± 2 HRC
(Derinlik 0,6-0,9 mm)
- AÇI DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI : MAX. 0,006 mm

KOD	KONİK	d (mm)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	FİYAT EUR
BT30.16.K	BT30	16	32	45	17	27	
BT30.22.K	BT30	22	40	47	19	31	
BT30.22.K.100	BT30	22	40	100	19	31	
BT30.27.K	BT30	27	48	49	21	33	
BT40.16.K	BT40	16	32	55	17	27	
BT40.16.K.100	BT40	16	32	100	17	27	
BT40.16.K.160	BT40	16	32	160	17	27	
BT40.22.K	BT40	22	40	55	19	31	
BT40.22.K.100	BT40	22	40	100	19	31	
BT40.22.K.160	BT40	22	40	160	19	31	
BT40.27.K	BT40	27	48	55	21	33	
BT40.27.K.100	BT40	27	48	100	21	33	
BT40.27.K.160	BT40	27	48	160	21	33	
BT40.32.K	BT40	32	58	60	24	38	
BT40.32.K.100	BT40	32	58	100	24	38	
BT40.32.K.160	BT40	32	58	160	24	38	
BT40.40.K	BT40	40	70	60	27	41	
BT40.40.K.100	BT40	40	70	100	27	41	
BT40.40.K.160	BT40	40	70	160	27	41	
BT50.16.K	BT50	16	32	70	17	27	
BT50.16.K.100	BT50	16	32	100	17	27	
BT50.16.K.160	BT50	16	32	160	17	27	
BT50.22.K	BT50	22	40	70	19	31	
BT50.22.K.100	BT50	22	40	100	19	31	
BT50.22.K.160	BT50	22	40	160	19	31	
BT50.27.K	BT50	27	48	70	21	33	
BT50.27.K.100	BT50	27	48	100	21	33	
BT50.27.K.160	BT50	27	48	160	21	33	
BT50.32.K	BT50	32	58	70	24	38	
BT50.32.K.100	BT50	32	58	100	24	38	
BT50.32.K.160	BT50	32	58	160	24	38	
BT50.40.K	BT50	40	70	70	27	41	
BT50.40.K.100	BT50	40	70	100	27	41	
BT50.40.K.160	BT50	40	70	160	27	41	
BT50.50.K	BT50	50	85	75	30	46	
BT50.60.K	BT50	60	98	75	50	66	