


ISO KOMBİNE MALAFALAR

DIN 2080

ISO 2583

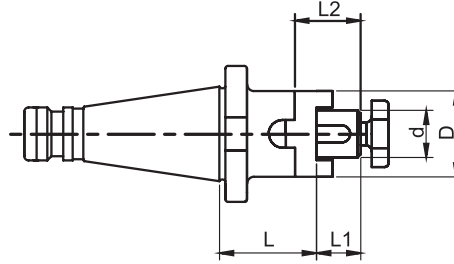

DIN 6358

- MALZEME : 20 Mn Cr5
- SERTLİK : 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI : DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI : MAX. 0,006 mm

KOD	KONİK	d (mm)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	FİYAT EUR
ISO30.16.K	ISO 30	16	32	35	17	27	
ISO30.22.K	ISO 30	22	40	35	19	31	
ISO30.27.K	ISO 30	27	48	35	21	33	
ISO40.16.K	ISO 40	16	32	52	17	27	
ISO40.22.K	ISO 40	22	40	52	19	31	
ISO40.27.K	ISO 40	27	48	52	21	33	
ISO40.32.K	ISO 40	32	58	52	24	38	
ISO40.40.K	ISO 40	40	70	52	27	41	
ISO50.16.K	ISO 50	16	32	55	17	27	
ISO50.22.K	ISO 50	22	40	55	19	31	
ISO50.27.K	ISO 50	27	48	55	21	33	
ISO50.32.K	ISO 50	32	58	55	24	38	
ISO50.40.K	ISO 50	40	70	55	27	41	
ISO50.50.K	ISO 50	50	85	55	30	46	
ISO50.60.K	ISO 50	60	97	55	50	66	