
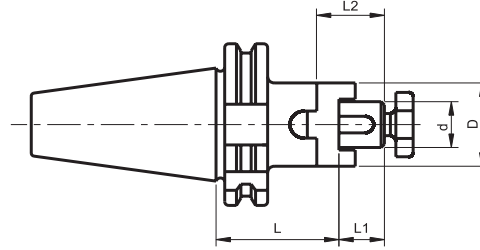


SK KOMBİNE MALAFALAR

DIN 69871

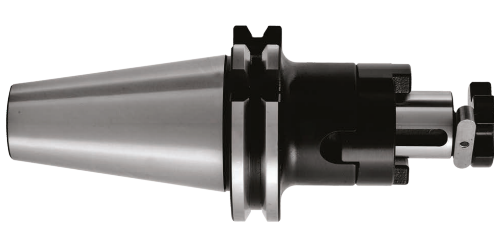

DIN 6358

- MALZEME : 20 Mn Cr5
- SERTLİK : 58 ± 2 HRc
(Derinlik 0,6-0,9 mm)
- AÇI : DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI : MAX. 0,006 mm

KOD	KONİK	d (mm)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	FİYAT EUR
SK40.16.K	SK40	16	32	55	17	27	
SK40.16.K.100	SK40	16	32	100	17	27	
SK40.16.K.160	SK40	16	32	160	17	27	
SK40.22.K	SK40	22	40	55	19	31	
SK40.22.K.100	SK40	22	40	100	19	31	
SK40.22.K.160	SK40	22	40	160	19	31	
SK40.27.K	SK40	27	48	55	21	33	
SK40.27.K.100	SK40	27	48	100	21	33	
SK40.27.K.160	SK40	27	48	160	21	33	
SK40.32.K	SK40	32	58	60	24	38	
SK40.32.K.100	SK40	32	58	100	24	38	
SK40.32.K.160	SK40	32	58	160	24	38	
SK40.40.K	SK40	40	70	60	27	41	
SK40.40.K.100	SK40	40	70	100	27	41	
SK40.40.K.160	SK40	40	70	160	27	41	