
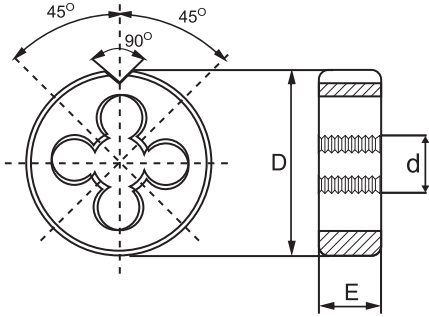





METRİK NORMAL DİŞ PAFTA HSS

d	P	D	E
M2	0,4	16	5
M2,5	0,45	16	5
M3	0,5	20	5
M3,5	0,6	20	5
M4	0,7	20	5
M4,5	0,75	20	7
M5	0,8	20	7
M6	1	20	7
M7	1	25	9
M8	1,25	25	9
M9	1,25	25	9
M10	1,5	30	11
M11	1,5	30	11
M12	1,75	38	14
M14	2	38	14
M16	2	45	18
M18	2,5	45	18
M20	2,5	45	18
M22	2,5	55	22
M24	3	55	22
M25	3	55	22
M26	3	55	22
M27	3	65	25
M30	3,5	65	25
M33	3,5	65	25
M36	4	65	25
M39	4	75	30
M42	4,5	75	30
M45	4,5	90	36
M48	5	90	36
M52	5	90	36

HSS → Yüksek hız çeliği

KULLANIM
ALANI

El ve makinalarda kullanmaya uygundur. Eğik ağız bileme özelliği ile temiz vida elde edilir. Tüm çelik türlerinde kullanıma uygundur. Sol diş açma işleminde kullanılır.