


DÖNER PUNTALAR - NORMAL UÇLU

TİP 100

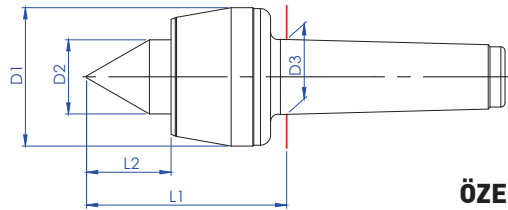

ÖZELLİKLER

- RULMAN ÖMRÜ 2000 İŞ SAATİDİR.
- PUNTA UCU SERTLİĞİ : 60-62 HRC
- SALGI : MAX. 0,008 mm

KOD	KONİK	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	DEVİR d/d (max)	PARÇA AĞIRLIĞI KG (max)
102	MK2	48	21.5	17.780	74	26	6000	150
103	MK3	57	25	23.825	86.5	31	4300	300
104	MK4	68	34.5	31.267	102	40	3500	600
105	MK5	82	44	44.399	118.5	50	2500	1100
106	MK6	103	54.5	63.348	148	60	1900	2000